


### Technical Specification

Insulator:	Black glass filled polyester PPS-GF-30-FR
Flammability:	UL 94V-0
Sleeve:	Brass CuZn 36Pb3 (36000)
Mating Pin: ( Ø )	0,47 / 0,67 mm
Mechanical Life:	min 500 cycles
Rated Current:	3A
Contact Resistance:	max. 10m Ohm
Dielectric Strength:	min 1000V rms
Minimal position of deliver:	4
Maximal position of deliver:	80
Pin Length L=	6,20mm

### Technical Drawing

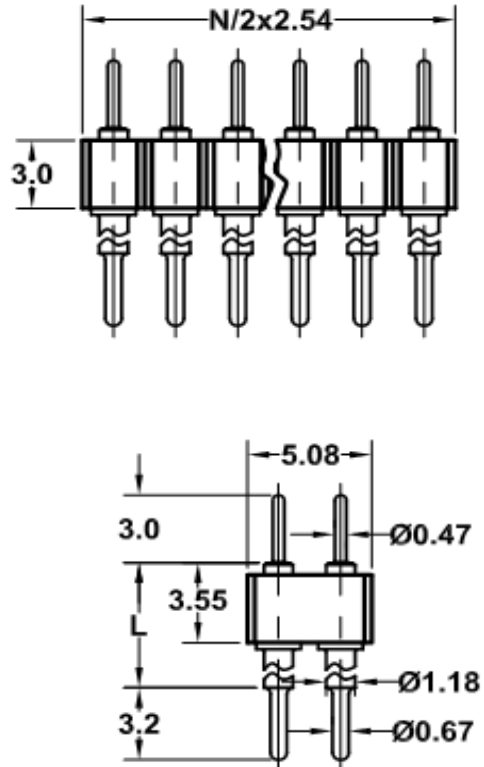

### Ordering Information

Serie	No. of Pos.	Solder Pin Plating	ROHS	Packing		
<b>T40187</b>	<b>80</b>	<b>A</b>	<b>R</b>	<b>B1</b>		

<b>04 ~ 80</b>	<b>A=</b> Tin 150µ" (Standard)	<b>R=</b> ROHS conform	<b>B1=</b> Bulk 100PCS
	<b>B=</b> Tin 200µ"	<b>N=</b> NON ROHS conform	
	<b>C=</b> GF		<b>Ix =</b> individuall
	<b>D=</b> Gold 2µ"		
	<b>E=</b> Gold 3µ"		
	<b>F=</b> Gold 10µ"		
	<b>G=</b> Gold 15µ"		
	<b>H=</b> Special		

<b>Machined Contact Pitch 2,54mm</b>	
Part No.:	<b>T40187</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.06.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 1