

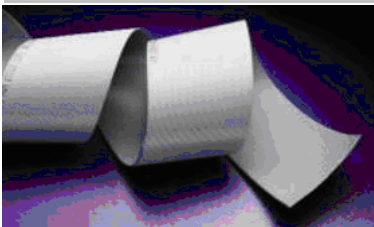


# EDCON-COMPONENTS

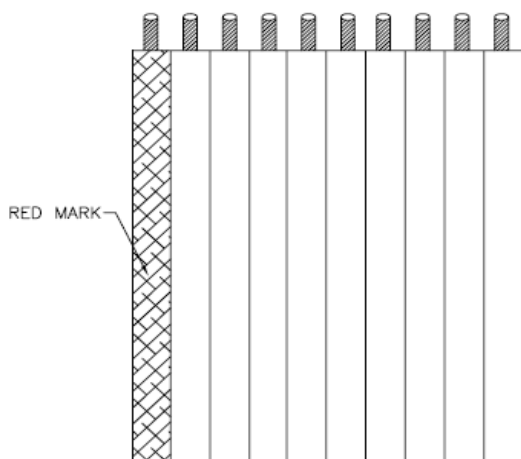

## Technical Information

Style	UL2651	Rating:	300V
AWG	28	Dielectric withstand.	500V AC/minute
Construction	7/0.127mm	Temperature Range:	-20°C ~ 70°C
Pitch	1,00mm	Contact Resistance:	0,127 < 237Ω/km
Insulation thickness	0,25mm		0,100 < 397Ω/km
Cores	2 ~ 68Pos.	Insulation Resistance:	100MΩ/km min.
Conductor Wire	Copper		

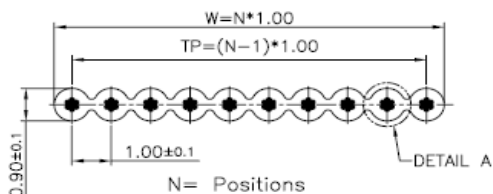

## Technical Specification

Cores	O.D ( A)	O.D ( B)	Tolerance (mm)	Feet/ Reel	Meter / Reel
2	0,90	2,00	.-+0,15	1639	500
3	0,90	3,00	.-+0,15	1639	500
4	0,90	4,00	.-+0,15	1639	500
5	0,90	5,00	.-+0,15	1639	500
6	0,90	6,00	.-+0,15	251	76,5
7	0,90	7,00	.-+0,15	251	76,5
8	0,90	8,00	.-+0,20	251	76,5
9	0,90	9,00	.-+0,20	251	76,5
10	0,90	10,00	.-+0,20	251	30,5 / 76,5
11	0,90	11,00	.-+0,20	251	30,5 / 76,5
12	0,90	12,00	.-+0,20	251	30,5 / 76,5
13	0,90	13,00	.-+0,20	251	30,5 / 76,5
14	0,90	14,00	.-+0,20	251	30,5 / 76,5
15	0,90	15,00	.-+0,20	251	30,5 / 76,5
18	0,90	18,00	.-+0,30	251	30,5 / 76,5
20	0,90	20,00	.-+0,30	251	30,5 / 76,5
22	0,90	22,00	.-+0,30	251	30,5 / 76,5
24	0,90	24,00	.-+0,30	251	30,5 / 76,5
26	0,90	26,00	.-+0,30	251	30,5 / 76,5
28	0,90	28,00	.-+0,30	251	30,5 / 76,5
30	0,90	30,00	.-+0,30	251	30,5 / 76,5
32	0,90	32,00	.-+0,30	251	30,5 / 76,5
34	0,90	34,00	.-+0,30	251	30,5 / 76,5
36	0,90	36,00	.-+0,30	251	30,5 / 76,5


**FLAT CABLE AWG28 Gray  
Pitch 1,00mm**

Part No.: **T29002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

# EDCON-COMPONENTS

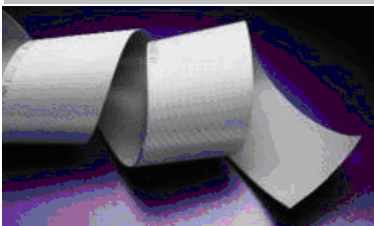

## Technical Specification

Cores	O.D ( A)	O.D ( B)	Tolerance (mm)	Feet/ Reel	Meter / Reel
38	0,90	38,00	.-0,30	251	30,5 / 76,5
40	0,90	40,00	.-0,40	251	30,5 / 76,5
42	0,90	42,00	.-0,40	251	30,5 / 76,5
44	0,90	44,00	.-0,40	251	30,5 / 76,5
46	0,90	46,00	.-0,40	251	30,5 / 76,5
48	0,90	48,00	.-0,40	251	30,5 / 76,5
50	0,90	50,00	.-0,40	251	30,5 / 76,5
60	0,90	60,00	.-0,40	251	30,5 / 76,5
64	0,90	64,00	.-0,40	251	30,5 / 76,5
68	0,90	68,00	.-0,40	251	30,5 / 76,5

## Ordering Informations

Serie	Cores	Color	M/Reel
-------	-------	-------	--------

<b>T29002</b>	<b>10</b>	<b>GR</b>	<b>76</b>
---------------	-----------	-----------	-----------

<b>10=</b> 2~68Pos.	<b>GR=</b> Gray w. RED-Line	<b>30=</b> 30,5 Meter/Reel
		<b>76=</b> 76,5 Meter/Reel
		<b>150=</b> 150 Meter/Reel

**FLAT CABLE AWG28 Gray  
Pitch 1,00mm**

Part No.: **T29002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2

Customer:

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)