

EDCON-COMPONENTS



Specifications

Features

- 5S Molded plastic body
- Terminals plated leads solderable per MIL-STD- 750 Method 2026
- High temperature soldering guaranteed:


Mechanical Data

- CASE: Molded plastic body over passivated junctions
- Terminals: plated leads solderable per MIL-STD-750, Method 2026
- Polarity: Polarity symbols marked on body
- Weight: 7,0gr.

Maximum Ratings & Electrical Characteristics Ratings at 25°C ambient temperature

	Symbols	GBL 301G	GBL 302G	GBL 303G	GBL 304G	GBL 305G	GBL 306G	GBL 307G	Unit
Maximum reecurrent peak reverse Voltage	VRRM	50	100	200	400	600	800	1000	Volt
Maximum rms Input voltage	VRMS	35	70	140	280	420	560	700	Volt
Maximum dc blocking Voltage	VDC	50	100	200	400	600	800	1000	Volt
Maximum average forward output rectified TA=50°C	I(AV)	3,0							Amps
Peak forward surge current 8,3ms single half sine-wave	IFSM	120							Amps
Maximum forward voltage IF=1,5A	VF	1,1							Volt
Maximum revese voltage TA=25°C	IR	5,0							µA
Maximum revese voltage TA=125°C	IR	500							µA
Operating and storage temperature range	TJ TSTG	-55°C to + 150°C							°C
Type junction capacitance VR=3,0V f01,0Mhz	CJ	95			40				pF

Technical Drawing (Unit: inch(mm))

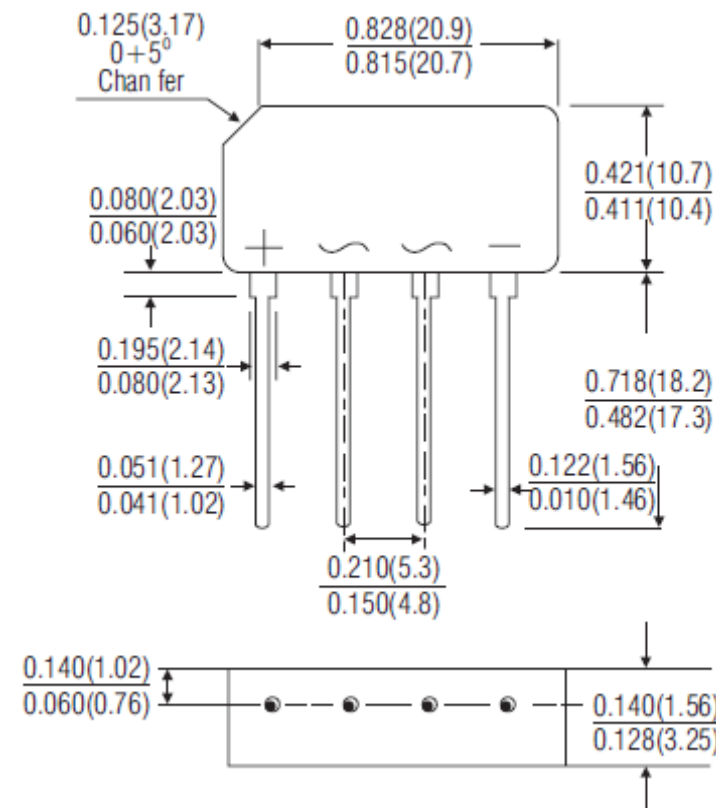

**Single In-Line Bridge Rectifier
3,0A (Glass Passivated)**

EDCON-Ser. **E14035**

International Serie: **GBLxxG**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 5

www.edcon-components.com


email: info@edcon-components.com

EDCON-COMPONENTS




Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Typical Forward Current Characteristics Derating Curve

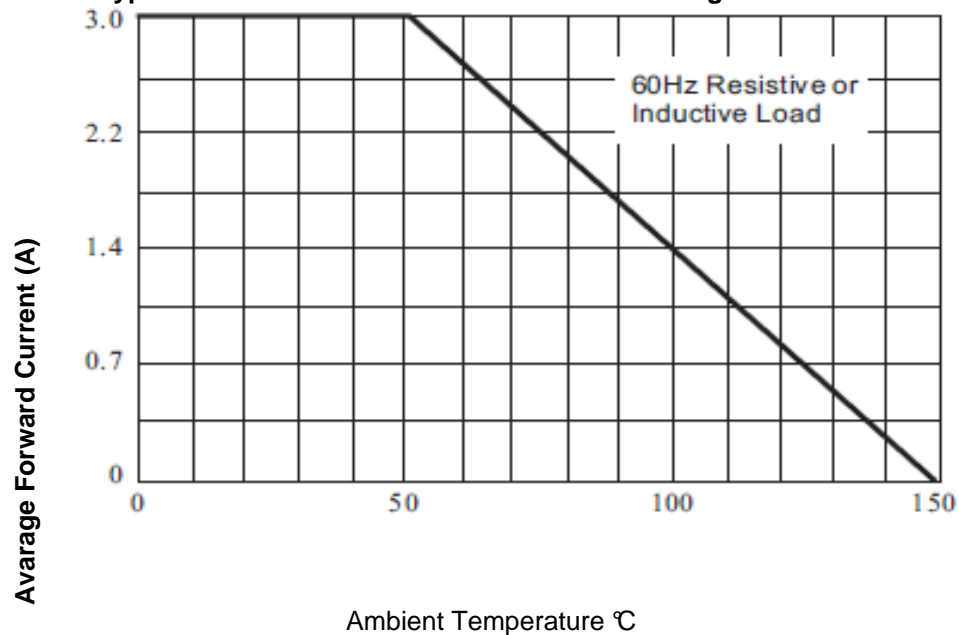

Maximum NON Repetitive Forward Surge Current

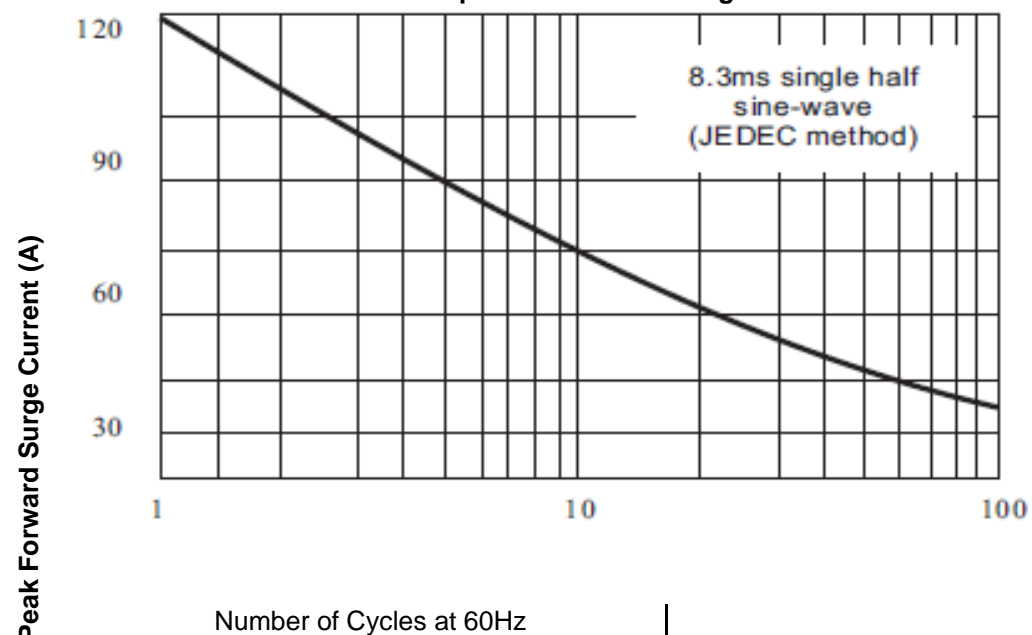

**Single Inline Bridge Rectifier
3,0A (Glass Passivated)**

EDCON-Ser. **E14035**

International Serie: **GBLxxG**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 5	

www.edcon-components.com


email: info@edcon-components.com

EDCON-COMPONENTS




Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Typical Forward Characteristics

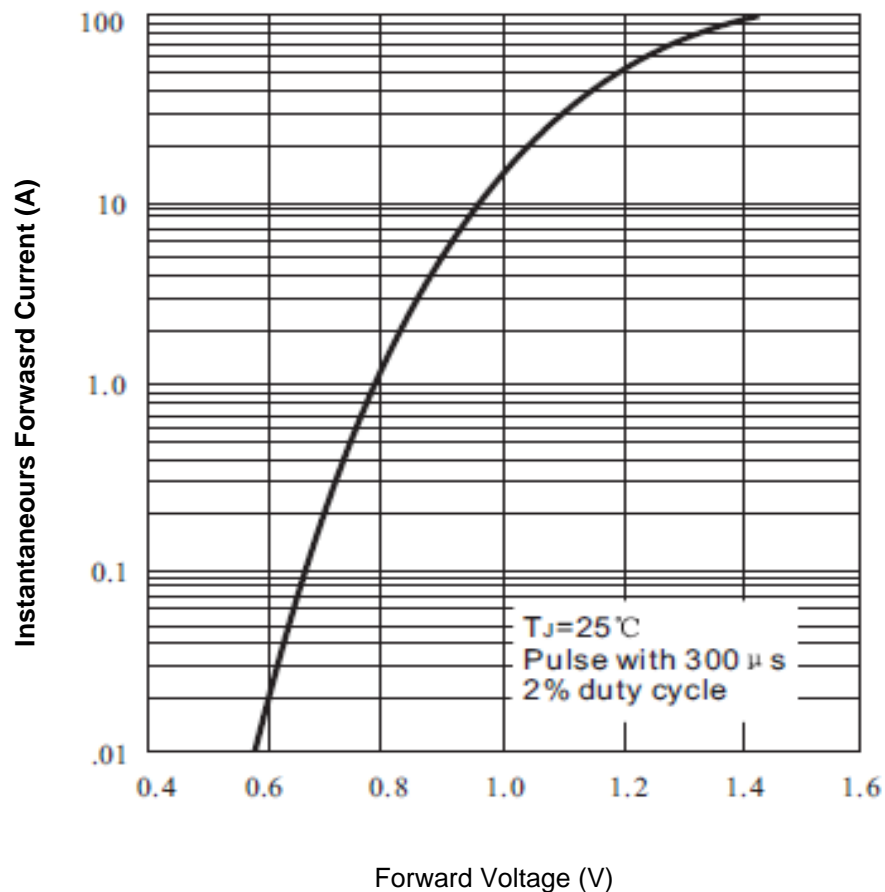

Typical Reverse Characteristics

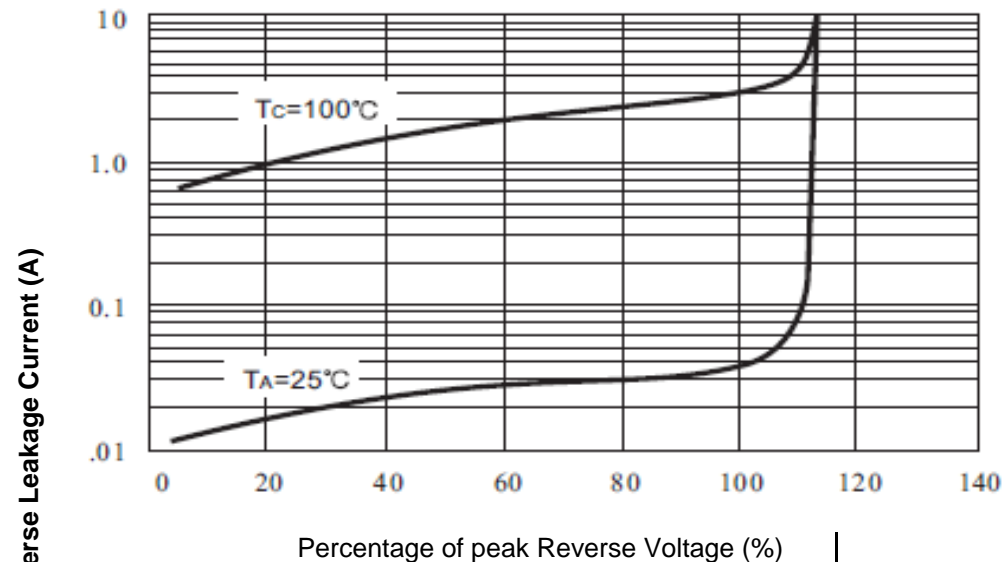

Single Inline Bridge Rectifier 3,0A (Glass Passivated)	
EDCON-Ser.	E14035
International Serie:	GBLxxG

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 5	

www.edcon-components.com


email: info@edcon-components.com

EDCON-COMPONENTS



Rating & Characteristics Curves (TA=25°C unless otherwise noted)

Typical Junction Capacitance

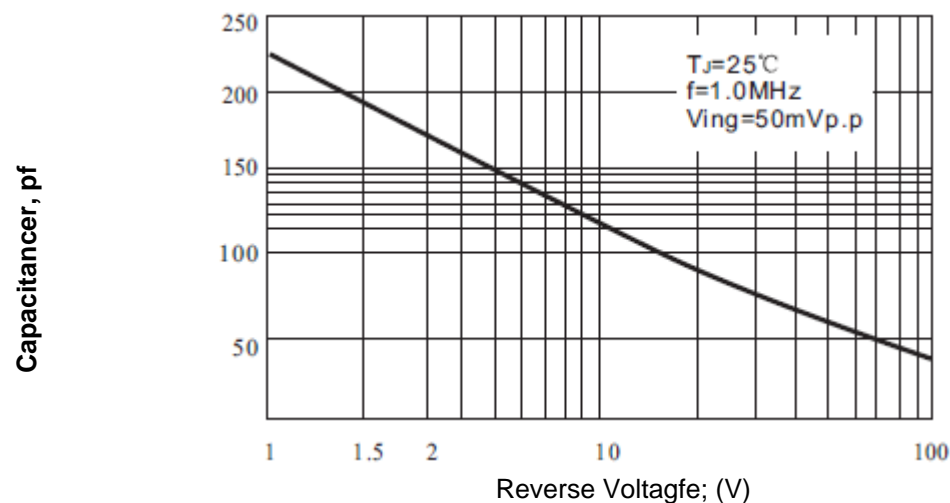

Ordering Informations

EDCON Serie	International Type	Lead Information	ROHS	Package						
E14035	GBL3xxG	LL	R	BX						

Look Voltage Code Table	LL = Long Lead	R = ROHS Conform	BX = Box
	L4 = Lead Length 4mm	N = NON ROHS Conform	


Single Inline Bridge Rectifier 3,0A (Glass Passivated)	
EDCON-Ser.	E14035
International Serie:	GBLxxG

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 5



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

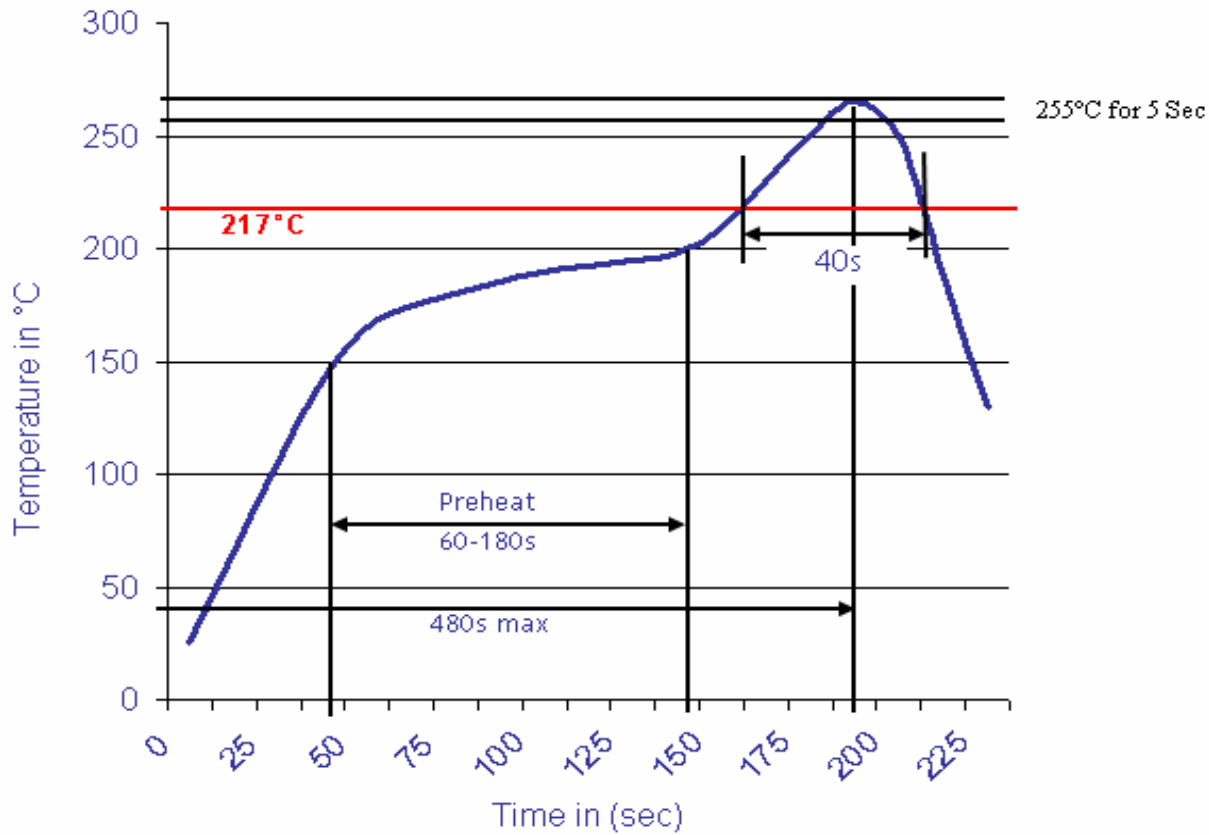

Single Inline Bridge Rectifier 3,0A (Glass Passivated)	
EDCON-Ser.	E14035
International Serie:	GBLxxG

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.05.2010
APPD:	Schumi			FINISH	Jamy		Sheet No.	5 from 5	

