


EDCON-COMPONENTS



Electric Data

Characteristic Impedance	50 Ohm
Frequency Range	0-4 GHz(50Ω)
Working Voltage	250 VRMS (max sea Level)
Dielectric Withstanding Voltage	750 VRMS (min sea Level)
VSWR	1.34 Max
Contact Resistance	Inner: 6milliohms (max.) Outer: 1milliohms (max.)
Insulation Resistance	1000 Megaohms (min)

Drawing (dimensions all into mm)

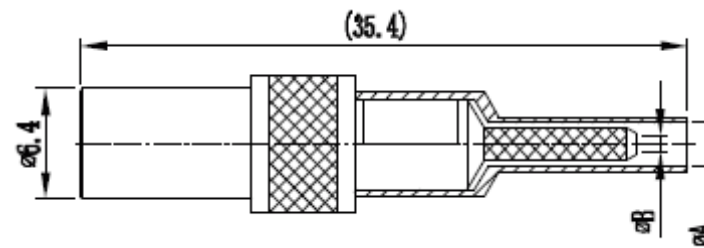

Mechanical Data

Durability Mating	500 Cycles (min)
-------------------	------------------

Material Data

Connector Parts	Materials	Plating Finish
Body	Brass	Gold
Female Pin	Beryllium Bronze	Gold
Insulators	PTFE	N/A
Ferrules	Copper alloy	Nickel
Spring Contact	Beryllium Bronze	Gold

PCB Layout

Environmental Data

Temperature Range	-65 ~ +165°C
-------------------	--------------

**SMB 50ohm Male Straight
Crimp Type With Solder
Window**

Part No.: **T55K1044-**

Note: We can provide other materials and plating specifications according to customers requirements

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.12.2017
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 2

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Impedance	Contact Pin Plating	Body Material	Body Plating	Special function	Special function	ROHS	Packing		
T55K1044-	50	G0	BR	G0	A	N	R	BU		

50= 50Ω	G0= Gold Plated	BR= Brass Material	G0= Gold Plated	A= A=2,5/B=1,0	N=No Special	R= ROHS Conform	BU= Bulk Ware		
				B= A=3,1/B=1,6		N= NON ROHS Conform	IV= Individual Package		
				C= A=4,2/B=2,3					
				D= A=5,2/B=3,1					

- A= 2/50S (SFF-50-1, SYV-50-1, RG-178B/U, 196/U)**
- B= 3/50S (SYV-50-2-1)**
- C= 4/50S (SFF-50-2-1)**
- D= 5/50S (SFF-50-3-1, SYV-50-3, RG-58/U, 141A/U, LMR-195, LMR-200)**

SMB 50ohm Male Straight Crimp Type With Solder Window

Part No.: **T55K1044-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.12.2017	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2		